

Botron **B7023** is Rubber/Vinyl Foam based anti-fatigue mat. 2'x3' and 3'x5' mats have tapered edges on all four sides. Roll mats have the same taper on side but can be easily cut with a razor knife to your needs. All mats should be used in conjunction with a floor mat ground (B9701). Grounding hardware comes with 2'x3' and 3'x5' mats does not come with rolls. **Disclaimer.** All statements of technical information are believed to be true and are based upon tests we believe to be reliable. The proper use and application for this product must be the responsibility of the user. The statements herein shall have no force or effect.

**B7023**




**B9701**  
Floor grd.

Pebble Texture

3/8"

Tapered Edge

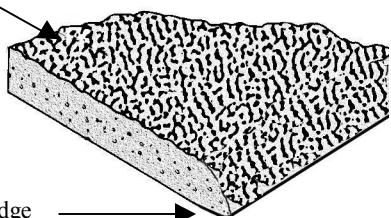

## PROPERTIES

## SPECIFICATIONS

RTT Resistance Top to Top	10' 6x10' Ohms	ANSI EOS/ESD S4.1
RTG Resistance to Ground	1x10' 5x10' Ohms	ANSI EOS/ESD S4.1
Charge Decay Time 5000 volts to 50v	<0.01 Seconds	Fed Std 101 Method 4046
Construction	Rubber/Vinyl	
Thickness	.375	Inches
Colors	Gray	
Surface Texture	Pebble	
Size, Width	2x3', 3'x5' 3'x60' & 4'x60'	

- Botron B7023 & B7035 come with a 3/8" snap installed and a 10' floor mat ground (B9701).
- Grounding hardware is not included with roll goods.
- Roll and runner should be grounded every 10'.

## RELATED PRODUCTS

<b>B7023</b> 2'X 3' Anti-fatigue mat w/grd	<b>B70360</b> 3'x60' Anti-fatigue roll
<b>B7035</b> 3'X 5' Anti-fatigue mat w/grd	<b>B70460</b> 4'x60' Anti-fatigue roll
<b>BEM35</b> 3'x 5' Type EM mat w/grd	<b>B4023</b> 2'x3' Diamond anti-fatigue w/grd
<b>BEM320</b> 3'x 20' Type EM mat w/grd	<b>B4035</b> 3'x5' Diamond anti-fatigue w/grd
<b>BEM223</b> 22"X 3' Type EM mat w/grd	<b>B40325</b> 3'x25' Diamond anti-fatigue w/grd
<b>B5723</b> 2'X 3' Cond. smooth top w/grd	<b>B40375</b> 3'x75' Diamond anti-fatigue w/grd
<b>B5735</b> 3'X 5' Cond. smooth top w/grd	<b>B57375</b> 3'X 75' Cond. smooth top grd
<b>B5823</b> 2"X 3' Cond. V-Grove w/grd	<b>B58325</b> 3'X2 5' Cond. V-Grove w/grd
<b>B5835</b> 3'X 5' Cond. V-Grove w/grd	<b>B58375</b> 3'X7 5' Cond. V-Grove w/grd

## INSTALLATION

For B7023 & B7035

Take out of bag

Take 10' floor ground and snap onto 3/8" snap on mat.

With other end of wire connect to ground.

Check with your facility people for building ground.

Let roll goods stand for 48 hours to lay flat.

## Lean Stream, LLC

2153 O'Toole Avenue, Suite G

San Jose, CA, 95131

Phone: 408-894-9400

Fax: 408-954-9989

Email: [info@lean-stream.com](mailto:info@lean-stream.com) / [www.lean-stream.com](http://www.lean-stream.com)

## 3/8" VR ANTI-FATIGUE MAT & ROLLS