
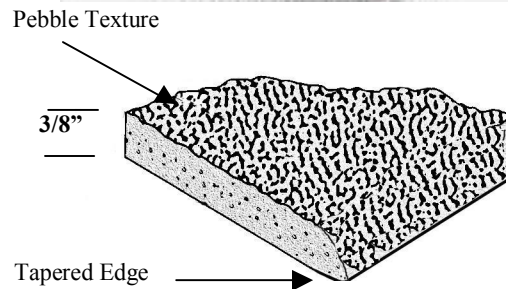


Botron **BF335** is Vinyl Foam based anti-fatigue mat. 3'x5' mats have tapered edges on all four sides. Roll mats have the same taper on side but can be easily cut with a razor knife to your needs. All mats should be used in conjunction with a floor mat ground (B9701). Grounding hardware comes with 3'x5' mats does not come with rolls. **Disclaimer.** All statements of technical information are believed to be true and are based upon tests we believe to be reliable. The proper use and application for this product must be the responsibility of the user. The statements herein shall have no force or effect.

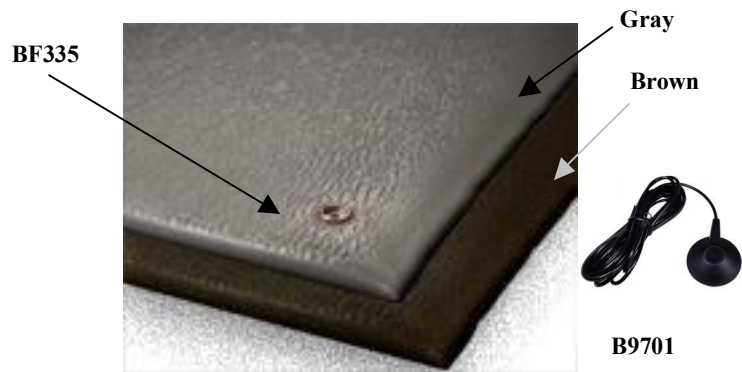

PROPERTIES	SPECIFICATIONS	
------------	----------------	--

RTT Resistance Top to Top	<10° Ohms	ANSI EOS/ESD S4.1
RTG Resistance to Ground	<10° Ohms	ANSI EOS/ESD S4.1
Charge Decay Time 5000 volts to 50v	<0.01 Seconds	Fed Std 101 Method 4046
Construction	Vinyl	
Thickness	.375	Inches
Colors	Gray & Brown	
Surface Texture	Pebble embossed	
Size, Width	2x3', 3'x5' 3'x60' & 4'x60'	

- Botron BF335 & BF435 come with a 3/8" snap installed and a 10' floor mat ground (B9701).
- Grounding hardware is not included with roll goods.
- Rolls and runners should be grounded every 10'.

RELATED PRODUCTS

BF335 3' X 5' Brown anti-fatigue mat w/grd	BF336 3'x60' Brown anti-fatigue roll
BF435 3' X 5' Brown Anti-fatigue mat w/grd	BF436 4'x60' Brown anti-fatigue roll
BEM35 3' x 5' Type EM mat w/grd	B4023 2'x3' Diamond anti-fatigue w/grd
BEM320 3' x 20' Type EM mat w/grd	B4035 3'x5' Diamond anti-fatigue w/grd
BEM223 22" X 3' Type EM mat w/grd	B40325 3'x25' Diamond anti-fatigue w/grd
B5723 2' X 3' Cond. smooth top w/grd	B40375 3'x75' Diamond anti-fatigue w/grd
B5735 3' X 5' Cond. smooth top w/grd	B57375 3' X 75' Cond. smooth top grd
B5823 2" X 3' Cond. V-Grove w/grd	B58325 3' X 2 5' Cond. V-Grove w/grd
B5835 3' X 5' Cond. V-Grove w/grd	B58375 3' X 7 5' Cond. V-Grove w/grd

INSTALLATION

For B7023 & B7035

Take out of bag

Take 10' floor ground and snap onto 3/8" snap on mat.

With other end of wire connect to ground.

Check with your facility people for building ground.

Let roll goods stand for 48 hours to lay flat.

Lean Stream, LLC

2153 O'Toole Avenue, Suite G

San Jose, CA, 95131

Phone: 408-894-9400

Fax: 408-954-9989

Email: info@lean-stream.com / www.lean-stream.com

3/8" TYPE S, ANTI-FATIGUE MAT & ROLLS